




Motorola V557 Camera Replacement

Written By: Matthew Sanders

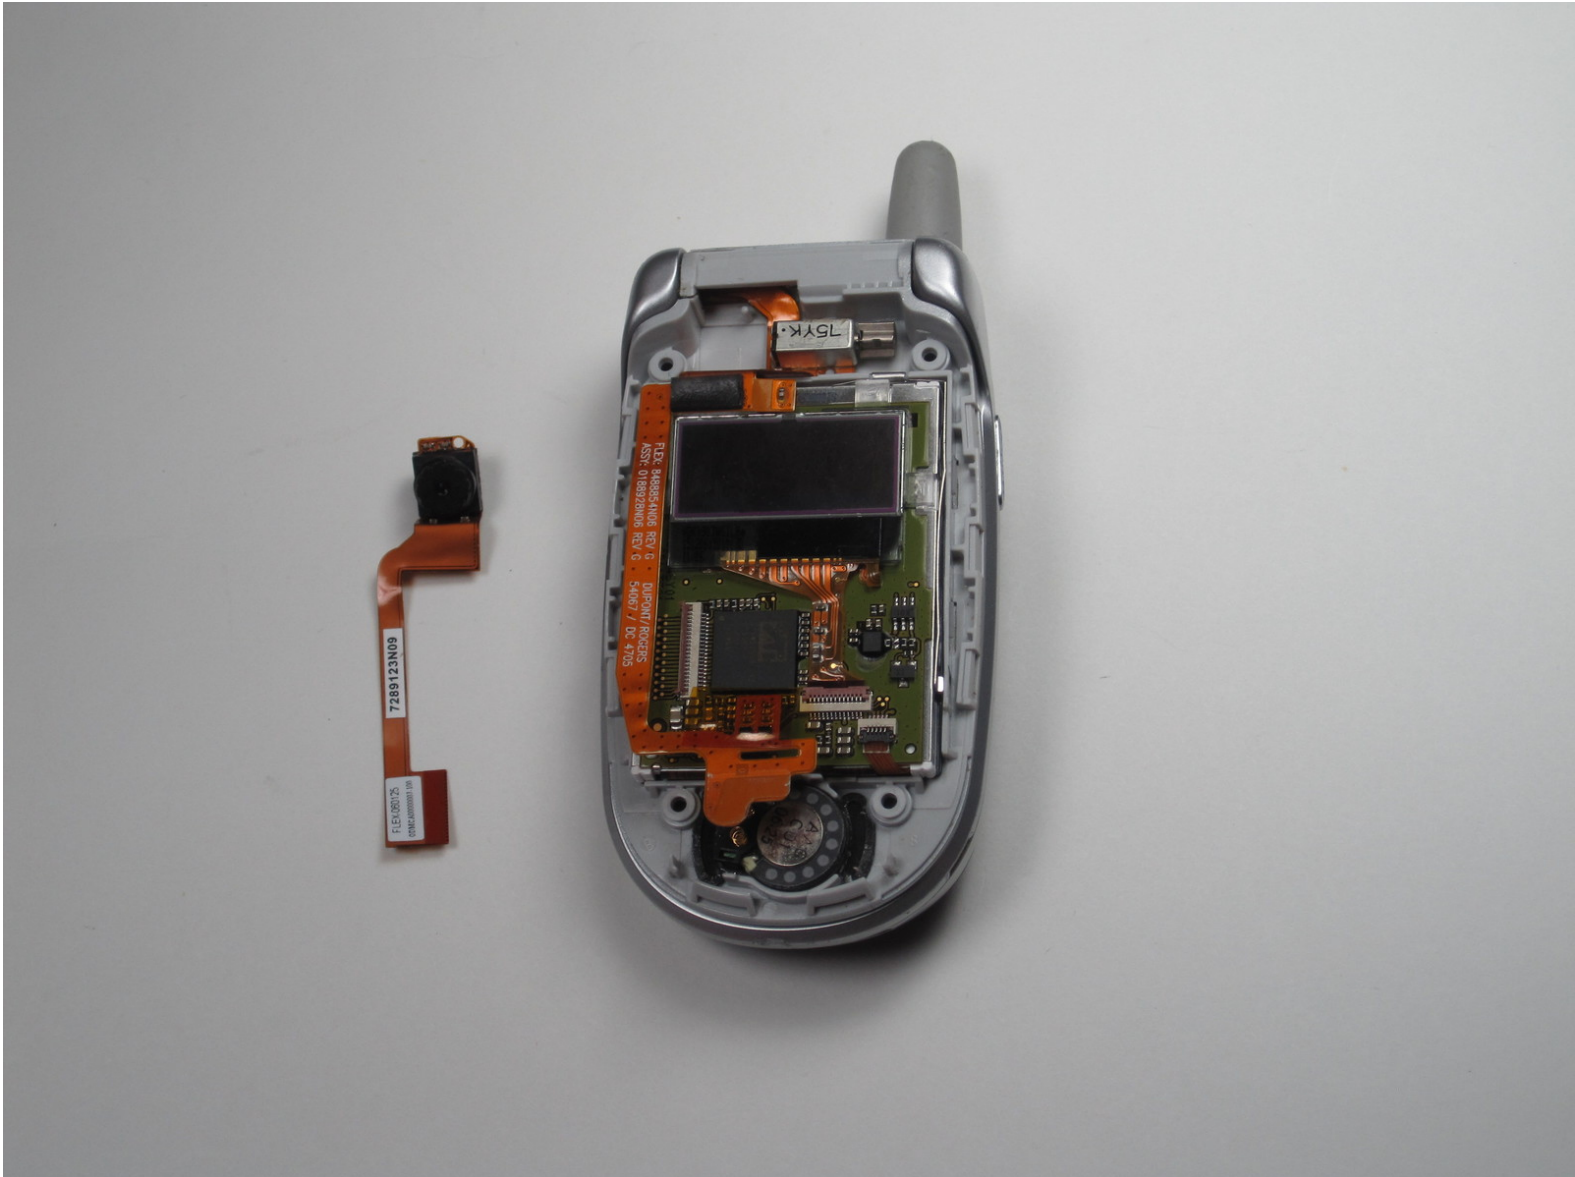

INTRODUCTION

Prerequisites: Battery, Faceplate



TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Push Pin](#) (1)
 - [Spudger](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery



- Push down on the silver button while sliding the back plate down to reveal the battery.

Step 2

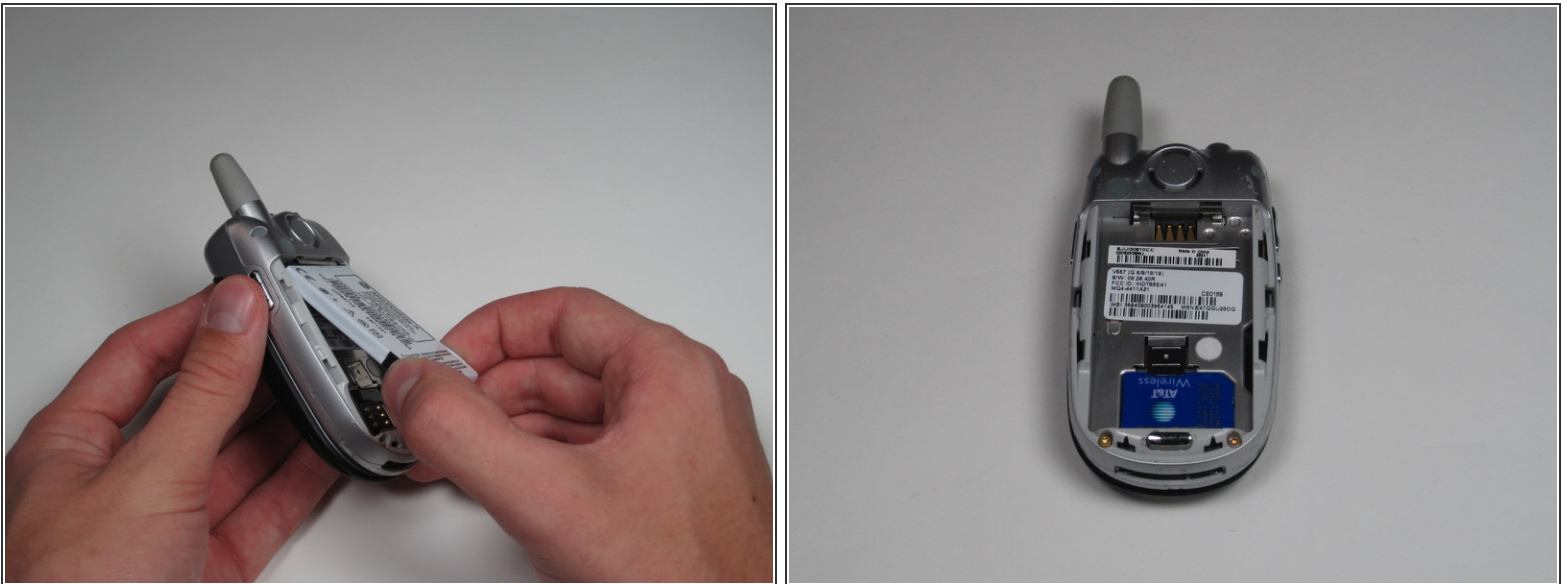

- Grab the lower edge of battery at the black areas and pull upward on the edges to remove it.

Step 3 — Faceplate



- Remove the four rubber stoppers from around the screen with a pin to reveal four screws.

Step 4



- Remove the four 3.8 mm T-6 Torx screws.

Step 5




- Separate the cover from the edges using a plastic opening tool.

Step 6



- With the edges separated, close the phone and lift off the faceplate with your fingers.

Step 7 — Camera

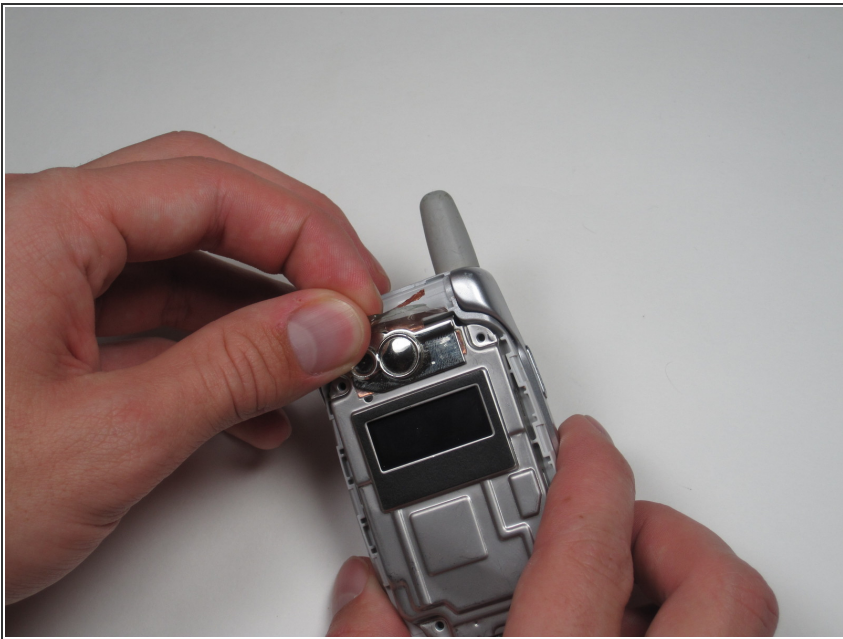


- Gently peel off the plastic film from the metal plate above the camera lens as shown.

Step 8



- Insert the spudger into the slots marked and gently pry upwards to remove the metal cover.
- Repeat the previous bullet for the two corresponding tabs on the opposite side of the phone.

Step 9

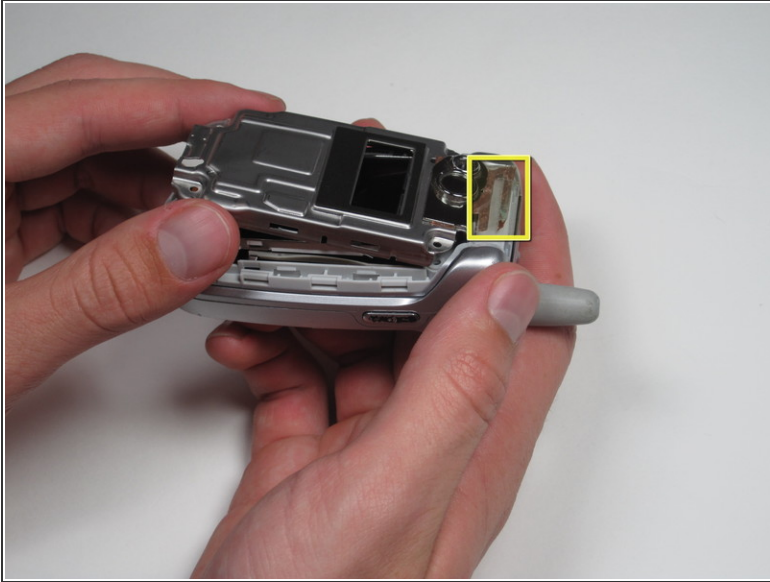

- Lift and peel back the tape attaching metal casing to body of the phone.
- Gently lift the metal cover and remove to expose the circuit board.

Step 10



- Using a plastic opening tool, pry or lift open the pink door shown.
- After the door is open, gently pull on the ribbon cable's corner to separate it from the board.


⚠ Work out the ribbon cable's end slowly and gently to avoid damaging the pink door port.

Step 11



- Use a plastic opening tool to dislodge and remove the rubber camera cover.

Step 12

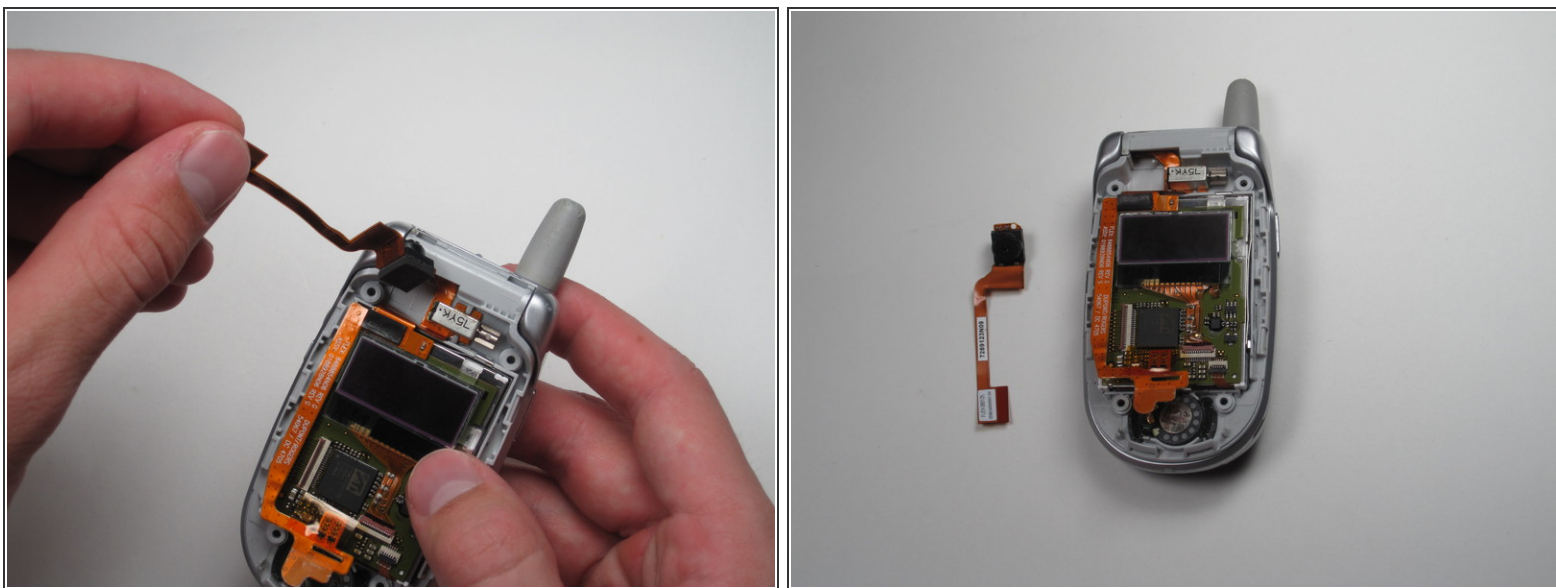

- Lift the top ribbon cable, with camera attached, up and away from the rest of the phone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-16 11:20:49 PM.